



## What makes CAMSO Construction the right choice?

When it comes to compact construction bias tires and tracks, we're about delivering the right product for your construction needs. Why? Because we believe that to ensure the lowest operating cost solution (LOCS) in a product, you must design it for a specific application to maximize its performance and durability. That's what we do.

- We work closely with equipment owners and operators to ensure we understand the right product for each application.
- Design and manufacture the most durable and reliable products available.
- Offer our high performance line-up to optimize your productivity and machine performance Maximize product availability to increase uptime.
- Give the best technical support and service in the industry with operator's safety in mind.
- Ensure that equipment operators of our products get the safest installation and operation guidelines.
- Supply an industry leading non prorated warranty across all the CAMSO Construction track range.

Our compact construction bias tires are recognized for their performance in terms of service life, puncture resistance, traction, as well as operator ride comfort. Our construction tracks offer superior protection against rolling path failure, carcass puncturing and flange cutting. They last at least 20% longer than standard tracks. At the end of the day, we ensure the reliability users expect from tires and tracks to increase their uptime.



## ABOUT US

CAMSO Construction is a global leader in off-the-road mobility solutions, specialising in high-performance tyres and tracks for the construction industry. With a product portfolio that spans compact construction bias tyres and tracks—CAMSO Construction delivers reliable solutions tailored to every surface, application, and operational challenge.

# TABLE OF CONTENTS


## 01

### THE CAMSO DIFFERENCE 54 TRACK COMPLETE LINE OVERVIEW 56 TREAD PATTERNS

1.1 CTL HXD	 06
1.2 CTL SD	 08
1.3 RUBBER OTT	 10
1.4 MEX HXD	12
1.5 MEX SD	 14

## CAMSO CTL HXD



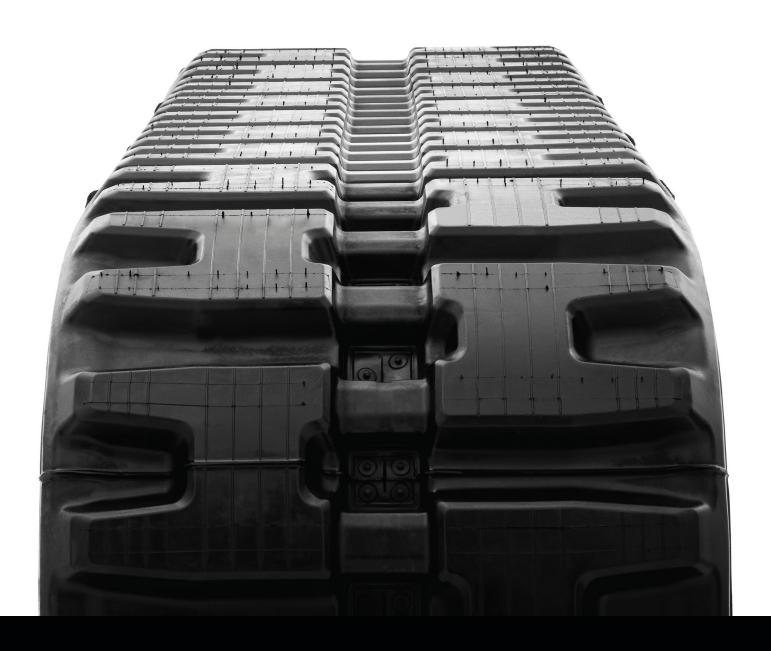

### THE BEST TRACK FOR DURA-BILITY AND PERFORMANCE

Count on enhanced durability and excellent traction to maximize your uptime on heavy-duty applications.

TREAD LIFE

FAILURE RESISTANCE

TRACTION



### CAMSO CTL HXD

SINGLE-CURE TECHNOLOGY WITH NEXT GENERATION RUBBER COMPOUND

Promotes even tread wearing for long, predictable tread life

### TRACKGUARD IRON CORE WITH HEAVY-DUTY CARCASS

Improves rolling path life for reduced failures and enhanced durability



### OPTIMIZED TREAD PATTERN WITH NEXT GENERATION RUBBER COMPOUND

Maintains excellent traction throughout tread life

### **ENDLESS HIGH-TENSILE STEEL CABLES**

Eliminates unexpected downtime due to cable/track breakage

durability						
WIDTH	LINKS	PITCH	TREAD	GUIDING	METAL PIECE	METAL PIECE TYPE
180	39	72	НН	В	R	CONVENTIONAL
180	39, 41, 42, 44, 45	72	ST	J	R	RAILTYPE
230	39, 41, 42, 44, 45	72	ST	J	R	RAIL TYPE
250	39	72	НН	В	R	CONVENTIONAL
250	52	72	НН	В	D	CONVENTIONAL
300	46	84	НН	В	Е	CONVENTIONAL
320	49, 50, 52, 53, 54, 56	86	НН	В	E	CONVENTIONAL
320	48, 52	86	нн	J	W	RAILTYPE
400	49, 50, 52, 53, 54, 55, 56, 60	86	НН	В	E	CONVENTIONAL
450	42, 52, 53, 55, 56, 59, 60	86	НН	В	E	CONVENTIONAL
450	48,50	100	нн	J	Е	RAIL TYPE
450	58	86	НА	В	E	CONVENTIONAL

### TREAD PATTERNS







### TRACK LIFE (196 hours)





After 196 hours of testing, the competitor's tracks failed. Camso's tread was in good condition on the entire track.



## CAMSO CTL SD





### ALL-SEASON TRACTION AND DURABILITY

The versatile solution for compact track loaders. On top of excellent performance all year long their enhanced durability and traction make them the best choice for use on various surface conditions.

_	1		П	J		М	Λ	V		
_		IП	-	ш	IΓ	W	м	W	ı.	F

TREAD LIFE

FAILURE RESISTANCE

TRACTION




### CAMSO CTL SD

#### SINGLE-CURE TECHNOLOGY

Promotes even tread wearing for long, predictable tread life

#### TRACKGUARD IRON CORE

 Improves rolling path life for reduced failures and enhanced durability

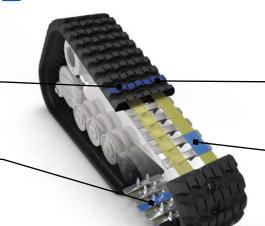

#### **VERSATILE ALL SEASON TREAD PATTERN**


Maintains excellent traction throughout tread life

#### **ENDLESS HIGH-TENSILE STEEL CABLES**

☐ Eliminates unexpected downtime due to cable/track breakage


WIDTH	LINKS	PITCH	TREAD	GUIDING	METAL PIECE	METAL PIECE TYPE
320	45,48,49,50,52,53,56	86	В	В	E	CONVENTIONAL
320	46,52	86	В	J	W	RAIL TYPE
400	49,50,52,53,54,55,56	86	В	В	E	CONVENTIONAL
450	48,50	100	В	J	E	RAIL TYPE
450	52,53,55,56,58,59,60,63	86	В	В	E	CONVENTIONAL

### **BRAKING DISTANCE TEST (in.)**

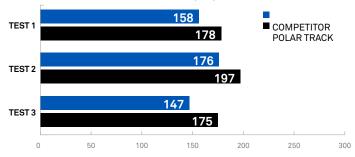

Throughout the entire tests, Camso's offering a better handling and lower slippage

### MANEUVERABILITY TEST (seconds)

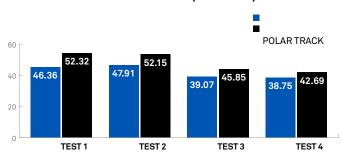


Tests on ice proved that the Camso CTL SD track is

To see the results on video, visit: bit.ly/1gGPYOf

#### TREAD PATTERN



### **CTL ROLLING RESISTANCE TEST**

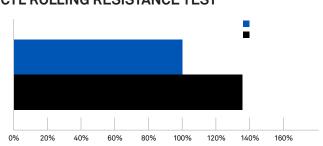

A test showed that the Camso tracks had than the other premium track competitor.

## CAMSO RUBBER OTT





### QUICK MOUNT ATTACHMENT FOR TRACKED PERFORMANCE

An over-the-tire add-on that increases skid steer loader traction, flotation and tire life. Installed in only 20 minutes, it'll enhance the productivity of your skid steer loader on asphalt, concrete and turf surfaces without causing damage or marks.

### **PERFORMANCE**

TREAD LIFE

FAILURE RESISTANCE

TRACTION



### CAMSO RUBBER OTT

EMBEDDED IRON CORE WITH ENGINEERED WING DESIGN

INTERNAL TRACTION RIB



**FULL RUBBER TRACK** 

FULL WIDTH, CONTINUOUS RUBBER TRACK FOOTPRINT

TIRE WIDTH	RIM DIAMETER	LINKS
10	16.5	26,27,28,29,31
12	16.5	29,30,31,32,33

### TREAD PATTERN



## CAMSO MEX HXD





## EXTREME RESISTANCE TO SEVERE CONDITIONS

A purpose-built solution for mini- excavators in harsh or extreme heavy-duty applications. Engineered to provide resistance against damage and catastrophic failure, they'll maximize your uptime.

### **PERFORMANCE**

TREAD LIFE

FAILURE RESISTANCE

TRACTION




## CAMSO MEX HXD

#### PATENTED 3S INTERNAL IRON CORE

Prevents detracking and minimizes vibrations for better ride quality and lower maintenance cost

### PREMIUM RUBBER COMPOUND AND EXTRA THICK CARCASS

Improves damage resistance and promotes even tread wear for the longest track life

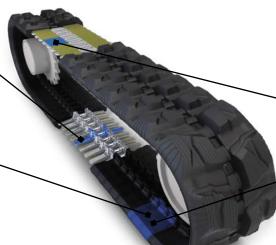

HIGH-TENSILE, RUBBER SEALED STEEL CABLES PROTECTED BY HEAVY-DUTY CARCASS AND TREAD

Resists carcass punctures and cable corrosion to extend service life

### CURBSHIELD TECHNOLOGY WITH HEAVY-DUTY CARCASS

Maximizes service life prior to track degradation process triggered by edge cutting leading to iron core corrosion and lower maintenance cost

					The second second			
WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECI- FICATION
230	48	АН	1	KA	26.5	24.5	3\$	STANDARD
300	55	АН	1	SA	35	27.5	3S	NARROW
300	55	АН	1	WA	35	27.5	3S	WIDE
350	73	АН	J	EA	40	25	3S RAIL TYPE	STANDARD
400	72.5	АН	1	WA	43	27.5	3S	NARROW
400	72.5	АН	1	EA	43	27.5	3S	WIDE
400	72.5	АН	J	EA	45.5	27.5	3S RAIL TYPE	STANDARD
400	73	АН	J	EA	41	25	3S RAIL TYPE	STANDARD
400	75.5	АН	J	WA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
450	71	АН	1	JA	48	30	3S	STANDARD
450	76	АН	1	JA	48	30	3S	STANDARD
450	81	АН	1	OA	46.5	30.5	3S	NARROW
450	81	АН	1	AA	46.5	30.5	3S	WIDE
450	83.5	АН	J	UA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
485	92	АН	1	D	62.5	27	OFFSET	STANDARD
500	92	AB	1	D	58	30	STANDARD	STANDARD

### TREAD PATTERNS



## CAMSO MEX SD





### PREDICTABLE SERVICE LIFE AND PERFORMANCE

The best mini-excavator solution for heavy-duty applications. Designed to provide superior life as well as resistance against irreversible damages for a long and predictable service life.

### PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

**TRACTION** 



## **MEX SD**

#### PATENTED 3S INTERNAL IRON CORE

Prevents detracking and minimizes vibrations for better ride quality and lower maintenance cost



HIGH-TENSILE, RUBBER SEALED STEEL CABLES PROTECTED BY HEAVY-DUTY CARCASS AND TREAD

Resists carcass punctures and cable corrosion to extend service life

### **CURBSHIELD TECHNOLOGY**

Extends service life prior to track degradation process triggered by edge cutting leading to iron core corrosion

WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFI CATION
130	72	А	А	RB	18	15	STANDARD	STANDARD
60	60	S	А	F	16	13	STANDARD	STANDARD
180		Χ	А	R	20	15	STANDARD	NARROW
160	72	Χ	А	Р	21	17	STANDARD	WIDE
		Р	В	R	21	17	RAILTYPE	STANDARD
		А	А	Р	22	15	STANDARD	WIDE
200	72	Х	А	R	20	15	STANDARD	NARROW
		V4	J	Р	24.5	17	RAILTYPE	WIDE
		А	А	Р	22	18	STANDARD	WIDE
	72	В	А	Р	22	18	STANDARD	WIDE
		V4	J	P2	21.5	17	RAILTYPE	WIDE
230		V1	1	KA	22	18	38	STANDARD
	48	V5	J	KA	29.5	20	3S RAILTYPE	STANDARD
		ZZ	J	K	22.5	23	RAILTYPE	STANDARD
	96	R1	1	K	24	23	STANDARD	STANDARD
	70	D	А	Р	24	17	STANDARD	WIDE
	72	R1	А	PR	30	18	STANDARD	WIDE
250	48	V1	1	KA	27	20	38	STANDARD
	52.5	V1	1	SA	29	24	38	NARROW
	55.5	V1	J	SA	32.5	24	3S RAILTYPE	STANDARD
260	55.5	OY	J	S	32.5	24	RAILTYPE	STANDARD
280	52.5	V5	J	SA	31	24	3S RAILTYPE	STANDARD
	50.5	V1	I	SA	31	23	38	NARROW
	52.5	V1	I	WA	31	23	3S	WIDE
300	53	V5	J	SA	32	25	3S RAILTYPE	STANDARD
	55	Y2	J	SF	36	25	RAILTYPE	STANDARD
	55.5	0	J	SA	34	20	3S OFFSET - RAILTYPE	STANDARD
050	52.5	V1	J	WA	39	25	3S RAILTYPE	STANDARD
350	52.5	V1	I	WA	30	22	38	WIDE
/00	70.5	V1	I	EA	39	25	3S	WIDE
400	72.5	V1	I	WA	39	25	3S	NARROW
	71	V1	I	JA	44	25	3S	STANDARD
450		V1	I	AA	42	28	3S	WIDE
	81	V1	ı	OA	42	28	3S	NARROW

## **MEX SD**

### TREAD PATTERNS









