



ENGINEERED FOR THE UNKNOWN.

CONQUER EVERY OFF-ROAD SURFACE
PRODUCT CATALOGUE - TIRES



What makes CAMSO Construction the right choice?

When it comes to compact construction bias tires and tracks, we're about delivering the right product for your construction needs.

Why? Because we believe that to ensure the lowest operating cost solution (LOCS) in a product, you must design it for a specific application to maximize its performance and durability. That's what we do.

- We work closely with equipment owners and operators to ensure we understand the right product for each application.
- Design and manufacture the most durable and reliable products available.
- Offer our high performance line-up to optimize your productivity and machine performance Maximize product availability to increase uptime.
- Give the best technical support and service in the industry with operator's safety in mind.
- Ensure that equipment operators of our products get the safest installation and operation guidelines.
- Supply an industry leading non prorated warranty across all the CAMSO Construction track range.

Our compact construction bias tires are recognized for their performance in terms of service life, puncture resistance, traction, as well as operator ride comfort. Our construction tracks offer superior protection against rolling path failure, carcass puncturing and flange cutting. They last at least 20% longer than standard tracks. At the end of the day, we ensure the reliability users expect from tires and tracks to increase their uptime.



OBSTACLES ARE JUST A FRAME OF MIND



ABOUT US

CAMSO Construction is a global leader in off-the-road mobility solutions, specialising in high-performance tires and tracks for the construction industry. With a product portfolio that spans compact construction bias tires and tracks-CAMSO Construction delivers reliable solutions tailored to every surface, application, and operational challenge.



TABLE OF CONTENTS

01

TIRES FOR SKID STEER LOADERS

1.1 SKS 511	06
1.2 SKS 532	08
1.3 SKS 732	10
1.4 SKS 753	12
1.5 SKS 774	14
1.6 SKS 775	16
1.7 HAULER SKS	18
1.8 HAULER SKZ	20
1.9 XTRA WALL	22

02

TIRES FOR BACKHOE LOADERS

2.1 BHL 530	24
2.2 BHL 532	26
2.3 BHL 732	28
2.4 BHL 753	30
2.5 SL R4	32

03

TELEHANDLERS AND 24" MOTOR GRADERS

3.1 GRD 732	34
3.2 TLH 532	36
3.3 TLH 732+	38
3.4 TLH 753	40
3.5 SL G2	42
3.6 SL G3	44

04

TIRES FOR SPECIALTY APPLICATIONS

4.1 CMP 576	48
4.2 MST 776	50

05

TIRES FOR COMPACT WHEEL LOADERS, MINI-DUMPERS AND COMPACT TELEHANDLERS

5.1 CWL 532	52
5.2 MPT 552	54
5.3 MPT 732	56
5.4 MPT 753	58
5.5 MPT 774	60
5.6 4L I3	62
5.7 4L R1	64
5.9 TM R4	66

06

TIRES FOR WHEEL EXCAVATORS

6.1 WEX 552	68
6.2 WEX 732	70
6.3 WEX 752	72
6.4 WL	74

07

TIRES FOR WHEEL LOADERS, ARTICULATED DUMP TRUCKS AND MOTOR GRADERS

7.1 WHL 773	76
7.2 WHL 775	78
7.3 LM L2	80
7.4 LM L3	82

CAMSO SKS 511



TRUCK-MOUNTED
FORKLIFTS



OFF-ROAD TRACTION AT ITS BEST

Number one in off-road traction. Purpose-built for tough applications, it's the ideal tire solution, providing exceptional durability in addition to outstanding traction.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 511



AGGRESSIVE CURVED R1 TREAD PATTERN

- Maximizes traction and improves ride quality

HAULER STEPPED TREAD DESIGN

- Maximizes tread cleanout in off-road conditions for improved traction



HEAVY-DUTY REINFORCED SIDEWALL

- Provides side impact protection for fewer flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
26x12-12 SS	N/A	8	22 (28)	Skid Steer	119	A2	3.40 (50)
29x12.50-15 NHS	N/A	10	17 (21)	NHS	107	B	3.10 (45)
31x15.50-15 NHS	N/A	8	21 (26)	NHS	116	B	3.10 (45)
26x12-16.5	N/A	10	21 (26)	NHS	125	A2	4.00 (57)
33x15.50-16.5 NHS	N/A	10	23 (29)	NHS	144	A2	3.40 (50)



CAMSO SKS 532



SKID STEER
LOADERS



BEST GENERAL DUTY SOLUTION

A next generation skid steer tire solution for tough, off-road applications. Delivers enhanced durability, traction and side impact resistance for excellent value, performance and low operating costs.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 532



EXTRA-DEEP TREAD DEPTH WITH CURVED TREAD LUGS

- Ensures great durability and extra traction

SELF CLEANING STEPPED TREAD

- Maximizes cleanout for improved off-road traction



IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

VOID GUARD TREAD IMPACT PROTECTION

- Protects from tread punctures to minimize flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
5.70-12 NHS	N/A	4	13 (16)	NHS	93	A2	4.10 (60)
23x8.50-12 SS	N/A	6	13 (16)	Skid Steer	101	A2	3.40 (50)
23x8.50-12 SS	N/A	12	13 (16)	Skid Steer	116	A2	6.90 (100)
26x12.00-12 SS	N/A	10	20 (25)	Skid Steer	124	A2	4.50 (65)
27x8.50-15 NHS	210/70-15 215/70-15	8	14 (18)	NHS	101	B	4.15 (60)
31x15.50-15 NHS	N/A	8	23 (29)	NHS	116	B	3.10 (45)
10-16.5 NHS	260/70-16.5 265/70-16.5	10	18 (23)	NHS	134	A2	5.20 (75)
12-16.5 NHS	300/70-16.5 305/70-16.5	12	19 (24)	NHS	145	A2	5.50 (80)
12-16.5 NHS	300/70-16.5 305/70-16.5	14	19 (24)	NHS	147	A2	6.20 (90)
14-17.5 NHS	355/70-17.5	14	24 (30)	NHS	155	A2	5.50 (80)

CAMSO SKS 732



SKID STEER
LOADERS



THE ULTIMATE OFF-ROAD SKID STEER TIRE SOLUTION

Next generation premium off-road
skid steer tire. Designed to maximize
traction and durability.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 732



**VOID GUARD
TREAD IMPACT PROTECTION**

- Protects from tread punctures to minimize flat tires

SELF-CLEANING STEPPED TREAD

- Maximizes cleanout for best off-road traction



**MASSIVE TREAD DEPTH
WITH OPTIMIZED LUG-TO-VOID RATIO**

- Maximizes off-road durability and traction

NEW IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
10-16.5	260/70-16.5 265/70-16.5	10	24 (30)	NHS	134	A2	5.2 (75)
12-16.5	300/70-16.5 305/70-16.5	12	26 (33)	NHS	145	A2	5.5 (80)
14-17.5	355/70-17.5	14	32 (40)	NHS	155	A2	5.5 (80)



CAMSO SKS 753



SKID STEER
LOADERS



MOST VERSATILE ALL-SEASON TIRE FOR MIXED SURFACE APPLICATIONS

A next generation tire solution for soft and mixed surface operations. With enhanced tread life, excellent traction and puncture resistance, it's the perfect choice for a wide variety of heavy-duty applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 753



INNOVATIVE NON-DIRECTIONAL TREAD PATTERN

- Provides greater durability and versatility for mixed surface applications

OPTIMIZED LUG-TO-VOID RATIO TREAD DESIGN

- Provides excellent versatility and durability



IMPACT GUARD WITH ENHANCED RIM PROTECTION

- Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires

OPEN, STEPPED SHOULDER LUGS

- Enhances cleanout and traction on softer surfaces

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
27x8.50-15 NHS	210/70-15 215/70-15	8	19 (24)	NHS	101	B	4.15 (60)
10-16.5 NHS	260/70-16.5 265/70-16.5	10	29 (37)	NHS	134	A2	5.20 (75)
12-16.5 NHS	300/70-16.5 305/70-16.5	12	29 (37)	NHS	145	A2	5.50 (80)
14-17.5 NHS	355/70-17.5	14	40 (50)	NHS	155	A2	5.50 (80)

CAMSO SKS 774

FORMERLY SOLIDEAL HAULER XD 44



SKID STEER
LOADERS



A TOUGH L5 HARD-SURFACES TIRE

A tough, durable L5 tire solution with exceptionally long life. With enhanced tread and side impact resistance, it's ideally suited to tackle tough, hard-surface applications.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 774



EXTRA-DEEP L5 TREAD

- Provides excellent tire life and tread impact resistance



80% LUG-TO-VOID RATIO

- Provides excellent durability protection against tread impacts

REINFORCED SIDEWALL

- Provides improved side impact resistance

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
10-16.5 NHS	260/70-16.5 265/70-16.5	10	35 (44)	NHS	134	A2	5.20 (75)

CAMSO SKS 775



SKID STEER
LOADERS



THE VERSATILE HEAVY-DUTY CHOICE

The ultra premium L5 skid steer tire solution. With ultimate durability and versatility, it's the best pneumatic tire choice for severe duty applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 775



MASSIVE 50/32 TREAD DEPTH WITH HIGH LUG-TO-VOID RATIO

- Maximizes tire life and tread impact resistance

INNOVATIVE TREAD PATTERN

- Optimizes traction and versatility in mixed and hard surface applications



NEW IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

HAULER STEPPED SHOULDER LUGS

- Improves cleanout and traction in mixed surface applications

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
10-16.5 NHS	260/70-16.5 265/70-16.5	10	38 (48)	NHS	134	A2	5.20 (75)
12-16.5 NHS	300/70-16.5 305/70-16.5	12	40 (50)	NHS	145	A2	5.50 (80)
14-17.5 NHS	355/70-17.5	14	41 (52)	NHS	155	A2	5.50 (80)



CAMSO HAULER SKS



SKID STEER
LOADERS



OFF-ROAD TRACTION AND DURABILITY

Designed to provide excellent durability
and traction in off-road conditions.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO HAULER SKS



WIDE, DEEP LUG DESIGN

- Provides enhanced durability and traction in off-road conditions

HAULER STEPPED TREAD DESIGN

- Provides excellent tread cleanout for improved traction



REINFORCED SIDEWALL

- Provides improved side impact resistance

UNDERTREAD PROTECTION

- Improves tread impact resistance for fewer flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
5.70-12 NHS	N/A	4	12 (15)	NHS	93	A2	4.15 (60)
23x8.50-12 SS	N/A	6	13 (16)	Skid Steer	101	A2	3.40 (50)
23x8.50-12 SS	N/A	12	13 (16)	Skid Steer	116	A2	6.90 (100)
27x8.50-15 NHS	210/70-15 215/70-15	6	14 (18)	NHS	96	B	3.10 (45)
27x8.50-15 NHS	210/70-15 215/70-15	8	14 (18)	NHS	101	B	4.15 (60)
27x10.50-15 NHS	N/A	8	22 (28)	NHS	103	B	4.15 (60)
27x10.50-15 NHS	N/A	10	22 (28)	NHS	108	B	5.20 (75)
31x15.50-15 NHS	N/A	8	24 (30)	NHS	116	B	3.10 (45)
31.5x13.00-16.5 NHS	N/A	10	18 (23)	NHS	139	A2	4.85 (70)
33x15.50-16.5 NHS	N/A	12	20 (25)	NHS	147	A2	4.15 (60)
33x15.50-16.5 NHS	N/A	14	21 (26)	NHS	150	A2	4.85 (70)
10-16.5 NHS	260/70-16.5 265/70-16.5	10	16 (21)	NHS	134	A2	5.20 (75)
12-16.5 NHS	300/70-16.5 305/70-16.5	10	20 (25)	NHS	141	A2	4.50 (65)
12-16.5 NHS	300/70-16.5 305/70-16.5	12	22 (28)	NHS	145	A2	5.50 (80)
14-17.5 NHS	355/70-17.5	14	26 (33)	NHS	155	A2	5.50 (80)
15-19.5 NHS	N/A	12	25 (31)	NHS	N/A	N/A	4.15 (60)
15-19.5 NHS	N/A	14	25 (31)	NHS	161	A2	4.80 (70)
15-19.5 NHS	N/A	16	25 (31)	NHS	N/A	N/A	5.50 (80)
385/65-22.5	15-22.5	12	28 (35)	NHS	N/A	N/A	5.00 (71)
385/65-22.5	15-22.5	16	28 (35)	NHS	N/A	N/A	6.90 (100)
385/65-22.5	15-22.5	20	28 (35)	NHS	N/A	N/A	7.20 (104)
385/45-28	N/A	18	25 (31)	NHS	N/A	N/A	7.50 (108)

CAMSO HAULER SKZ



SKID STEER
LOADERS



VERSATILE DURABILITY ON MIXED SURFACES

Provides incredible versatility and durability—the ideal tire solution for mixed-surface operations. With enhanced tread life, even wearing and puncture resistance, it's the perfect choice for a variety of severe applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO HAULER SKZ



NON-DIRECTIONAL EXTRA DEEP TREAD

- Improves tread life and resistance to punctures

LARGE FOOTPRINT WITH MASSIVE LUG-TO-VOID RATIO

- Provides excellent durability and even tread wearing



VERSATILE TREAD PATTERN

- Optimizes traction and handling on mixed and hard surfaces

WIDE SIDEWALL

- Provides superior side impact resistance

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
10-16.5 NHS	260/70-16.5 265/70-16.5	10	31 (39)	NHS	134	A2	5.20 (75)
12-16.5 NHS	300/70-16.5 305/70-16.5	10	34 (43)	NHS	141	A2	4.50 (65)
12-16.5 NHS	300/70-16.5 305/70-16.5	12	34 (43)	NHS	145	A2	5.50 (80)
14-17.5 NHS	355/70-17.5	14	44 (55)	NHS	155	A2	5.50 (80)
31x15.5-15 NHS	N/A	8	24 (30)	NHS	116	B	3.10 (45)
33x15.50-16.5 NHS	N/A	14	35 (44)	NHS	150	A2	4.85 (70)

CAMSO XTRA WALL



SKID STEER
LOADERS



SUPERIOR VALUE AND PERFORMANCE

A proven soft surface skid steer tire.
Standard traction tread provides
general-duty performance
in softer conditions.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO XTRA WALL



WIDE, DEEP LUG DESIGN

- Provides enhanced durability and traction in off-road conditions

HAULER STEPPED TREAD DESIGN

- Provides enhanced cleanout for improved traction



REINFORCED SIDEWALL

- Provides improved side impact resistance

RIM PROTECTOR

- Protects wheel from impact damage

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
5.70-12 NHS	N/A	4	11 (14)	NHS	93	A2	4.10 (60)
5.70-12 NHS	N/A	6	13 (16)	NHS			
23x8.50-12 SS	N/A	6	14 (18)	Skid Steer	101	A2	3.40 (50)
26x12.00-12 SS	N/A	10	21 (27)	Skid Steer	124	A2	4.50 (65)
27x10-12 NHS	N/A	14	21 (27)	NHS	124	A2	4.50 (65)
27x8.50-15 NHS	210/70-15 215/70-15	6	15 (19)	NHS	96	B	3.10 (45)
27x8.50-15 NHS	210/70-15 215/70-15	8	15 (19)	NHS	101	B	4.15 (60)
7.00-15 SS	N/A	6	19 (24)	Skid Steer	121	A2	4.15 (60)
31x15.50-15 NHS	N/A	8	24 (30)	NHS	116	B	3.10 (45)
26x12-16.5 NHS	300/40-16.5	10	24 (30)	NHS	125	A2	4.00 (57)
10-16.5 NHS	260/70-16.5 265/70-16.5	6	17 (22)	NHS	124	A2	3.10 (45)
10-16.5 NHS	260/70-16.5 265/70-16.5	8	17 (22)	NHS	130	A2	4.10 (60)
10-16.5 NHS	260/70-16.5 265/70-16.5	10	18 (23)	NHS	134	A2	5.20 (75)
10-16.5 NHS	260/70-16.5 265/70-16.5	12	18 (23)	NHS	138	A2	6.20 (90)
12-16.5 NHS	300/70-16.5 305/70-16.5	10	18 (23)	NHS	141	A2	4.50 (65)
12-16.5 NHS	300/70-16.5 305/70-16.5	12	18 (23)	NHS	145	A2	5.50 (80)
14-17.5 NHS	355/70-17.5	12	31 (39)	NHS	151	A2	4.50 (65)

CAMSO BHL 530

FORMERLY SOLIDEAL MR F3



BACKHOE
LOADERS



PERFORMANCE AND QUALITY YOU CAN RELY ON

Delivers reliable performance and quality for tough backhoe applications. Count on this all-purpose steer tire for excellent stability and improved operator comfort on a variety of surfaces.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO BHL 530



ENGINEERED F3 RIB TREAD DESIGN

- Provides smooth ride and effective steering



ROBUST CARCASS

- Reduces tread crowning for even wearing and excellent stability

DEEP TREAD DEPTH

- Enhances longevity

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
11L-15SL IMP	-	12	13 (16)	121	B	3.6 (52)
11L-16SL IMP	-	12	13 (16)	123	B	3.6 (52)
14L-16.1SL IMP	14.5/75-16.1SL	14	17 (21)	138	B	3.6 (52)



CAMSO BHL 532



BACKHOE
LOADERS



ROADING COMFORT AND OFF-ROAD TRACTION

A versatile backhoe tire solution providing great off-road traction while reducing vibrations for better driving comfort from site to site.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO BHL 532



CONTINUOUS MULTI-ANGLE TREAD LUGS

- Minimizes vibrations for improved ride quality



ENGINEERED LOW-VIBRATION TREAD DESIGN

- Minimizes vibrations for improved ride quality

HAULER STEPPED TREAD DESIGN

- Improves self-cleaning and stone ejection for excellent traction

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
12.5/80-18 IMP	320/80-18	12	24 (30)	142	A8	3.7 (54)
16.9-24 IND	440/80-24, 16.5/85-24	12	22 (28)	149	A8	2.6 (38)
17.5L-24 IND	460/70-24	10	24 (30)	144	A8	2.2 (32)
19.5L-24 IND	500/70-24	12	26 (33)	151	A8	2.3 (33)
21L-24 IND	540/70-24	12	26 (33)	155	A8	2.2 (32)
18.4-26 IND	480/80-26	12	25 (31)	156	A8	2.5 (36)
16.9-28 IND	440/80-28	12	28 (35)	152	A8	2.6 (38)

CAMSO BHL 732



BACKHOE
LOADERS



BEST OFF-ROAD TRACTION AND DURABILITY

The ultimate mixed soft surface backhoe tire solution. Deepest traction tread with enhanced protective features to maximize durability in softer conditions

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO BHL 732



MASSIVE DIRECTIONAL TREAD LUGS WITH EXTENDED CENTRE BLOCKS

- Maximizes off-road traction and durability

WRAPAROUND STEPPED TREAD DESIGN

- Maximizes tread cleanout for best off-road traction



EXTRA THICK VOID GUARD

- Maximizes tread impact protection to reduce risk of punctures

HEAVY-DUTY SIDEWALL WITH ENHANCED RIM PROTECTION

- Provides enhanced sidewall and rim flange protection, reducing impact damage and flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX		SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
12.5/80-18 IMP	12.5/80-18 IMP	12	25 (32)	Free roll: 142	Drive: 129	A8	3.70 (54)
19.5L-24 IND	19.5L-24 IND	12	25 (31)	151		A8	2.30 (33)
21L-24 IND	21L-24 IND	12	38 (48)	155		A8	2.20 (32)
16.9-28 IND	16.9-28 IND	12	35 (44)	152		A8	2.60 (38)

All tires listed are tubeless.

CAMSO BHL 753



BACKHOE
LOADERS



DURABILITY MEETS RIDE QUALITY

Thoroughly designed to ensure
even tread wearing and reduce vibrations.
Comfort and long tire life combined.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO BHL 753



NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO

- Ensures even tread wearing for greater durability

OPTIMIZED, CONTINUOUS-CONTACT TREAD PATTERN

- Significantly reduces vibration for improved ride quality



NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO

- Protects against tread impacts and punctures

TAPERED TREAD LUGS

- Improves lug stability for even wearing

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
12-16.5 NHS	300/70-16.5; 305/70-16.5	12	18 (23)	145	A2	5.5 (80)
12.5/80-18 IMP	320/80-18	12	23 (29)	142 - 129	A8	3.7 (54)
12.5/80-18 IMP	320/80-18	14	23 (29)	146 - 134	A8	4.3 (62)
19.5L-24 IND	500/70-24	12	25 (31)	151	A8	2.3 (33)
18.4-26 IND	480/80-26	12	25 (31)	156	A8	2.5 (36)
16.9-28 IND	440/80-28	12	28 (35)	152	A8	2.6 (38)

CAMSO SL R4



BACKHOE
LOADERS



HEAVY-DUTY DURABILITY AND TRACTION

Designed for extended tire life,
heavy-duty durability
and superior traction
in severe off-road conditions.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SL R4



HEAVY-DUTY CARCASS

- Improves stability and side impact resistance

HAULER STEPPED TREAD DESIGN

- Improves self-cleaning and stone ejection for excellent traction



OPTIMIZED LUG-TO-VOID RATIO WITH EXTRA-DEEP TREAD

- Increases tread life and off-road traction

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
250/80-18	10.5/80-18 IMP	10	22 (28)	119 – 131	A8	3.7 (54)
320/80-18	12.5/80-18 IMP	12	29 (39)	127 – 142	A8	3.7 (54)
320/80-18	12.5/80-18 IMP	14	29 (37)	134 – 146	A8	4.3 (62)
320/80-18	12.5/80-18 IMP	16	26 (33)	135 – 148	A8	4.9 (71)
340/80-18	12.5-18, 335/80-18	10	26 (33)	132	B	3.6 (52)
340/80-18	12.5-18, 335/80-18	12	26 (33)	135	B	4.2 (61)
14.9-24 IND	N/A	12	29 (37)	145	A8	2.9 (42)
440/80-24	16.9-24, 16.5/85-24	12	23 (29)	149	A8	2.9 (42)
460/70-24	17.5L-24	10	25 (31)	144	A8	2 (32)
460/70-24	17.5L-24	12	32 (40)	149	A8	2.6 (38)
500/70-24	19.5L-24	12	28 (35)	151	A8	2.3 (33)
540/70-24	21L-24	12	36 (45)	155	A8	2.2 (32)
480/80-26	18.4-26	12	28 (35)	156	A8	2.5 (36)
440/80-28	16.9-28	12	33 (42)	152	A8	2.6 (38)

CAMSO GRD 732



MOTOR GRADERS



ULTIMATE OFF-ROAD TRACTION AND STABILITY

Excellent solution for tough off-road applications delivering superior traction, durability, and impact resistance in pneumatic grader tires

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO GRD 732



VOID GUARD IMPACT PROTECTION

- Enhances tread impact resistance to reduce risk of punctures

WRAPAROUND STEPPED TREAD DESIGN

- Maximizes tread cleanout for best off-road traction and side impact resistance



MASSIVE TREAD DEPTH WITH CURVED TREAD LUGS

- Ensures excellent traction on soft surfaces and long wearing durability when operating at higher speeds

IMPACT GUARD WITH ENHANCED RIM PROTECTION

- Provides maximum sidewall and rim flange protection, reducing risks of impact damages and flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
14.00-24TG * (Available as TLH or GRD)	N/A	16	34 (43)	Grader	153	A8	3.75 (54)
				Earthmover	156	B	3.75 (54)
				Loader-Dozer	177	A2	5.50 (80)
16.00-24 * (Available only as GRD)	N/A	16	33 (42)	Grader	160	A8	3.25 (47)
				Earthmover	163	B	3.25 (47)
				Loader-Dozer	181	A2	4.25 (62)

All tires listed are tubeless.



CAMSO TLH 532



TELEHANDLERS



HIGH QUALITY FOR STANDARD DUTY

A high quality, reliable tire solution.
With enhanced durability
and even tread wearing,
it's the best choice
for light off-road applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO TLH 532



DEEP TREAD PATTERN

- Enhances durability and traction

OPTIMIZED TREAD PATTERN

- Provides good traction in off-road conditions

The image shows a side profile of a CAMSO TLH 532 tire. Two blue callout lines point to specific features: one points to the deep, aggressive tread pattern on the shoulder, and the other points to the optimized tread pattern in the center of the tread.

FLATTER TREAD PROFILE

- Resists tread crowning for even wearing

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
13.00-24TG	N/A	12	21 (26)	Grader	143	A8	3.0 (44)
				Earthmover	146	B	3.0 (44)
				Loader-Dozer	168	A2	4.5 (65)
14.00-24TG	N/A	12	22 (28)	Grader	147	A8	2.75 (40)
				Earthmover	150	B	2.75 (40)
				Loader-Dozer	172	A2	4.25 (62)



CAMSO TLH 732+



TELEHANDLERS



MOTOR GRADERS



ULTIMATE OFF-ROAD TRACTION AND STABILITY

Excellent solution for tough off-road applications delivering superior traction, durability, and impact resistance in pneumatic telehandler and grader tires

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO TLH 732+

EXTRA THICK VOID GUARD
IMPACT PROTECTION

- Maximizes tread impact protection to reduce risk of punctures

WRAPAROUND STEPPED TREAD DESIGN

- Maximizes tread cleanout for best off-road traction

MASSIVE TREAD DEPTH
WITH CURVED TREAD LUGS

- Ensures excellent traction on soft surfaces and long wearing durability when operating at higher speeds

IMPACT GUARD WITH ENHANCED RIM PROTECTION

- Provides maximum sidewall and rim flange protection, reducing risks of impact damages and flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
13.00-24TG	N/A	12	31 (39)	Grader	143	A8	3.0 (44)
				Earthmover	146	B	3.0 (44)
				Loader-Dozer	168	A2	4.5 (65)
13.00-24TG	N/A	16	29 (37)	Grader	153	A8	4.0 (58)
				Earthmover	152	A8	4.0 (58)
				Loader-Dozer	173	A2	6.0 (87)
14.00-24TG	N/A	12	34 (43)	Grader	147	A8	2.75 (40)
				Earthmover	150	B	2.75 (40)
				Loader-Dozer	172	A2	4.25 (62)
14.00-24TG * (Available as TLH or GRD)	N/A	16	34 (43)	Grader	153	A8	3.75 (54)
				Earthmover	156	B	3.75 (54)
				Loader-Dozer	177	A2	5.50 (80)

All tires listed are tubeless.

CAMSO TLH 753



TELEHANDLERS



MOTOR GRADERS



NEXT-LEVEL DURABILITY AND VERSATILITY

This highly versatile telehandler tire designed for mixed and hard surface applications offers next-level durability, traction and stability.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO TLH 753

EXTRA-DEEP NON-DIRECTIONAL
TREAD PATTERN

- Optimizes durability and traction on mixed and hard surfaces

STEPPED TREAD DESIGN

- Enhances traction in softer surfaces



OPTIMIZED LUG-TO-VOID RATIO

- Provides excellent traction for mixed and hard surface applications

NEW IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
13.00-24TG	N/A	12	23 (29)	Grader	143	A8	3.0 (44)
				Earthmover	146	B	3.0 (44)
				Loader-Dozer	168	A2	4.5 (65)
14.00-24TG	N/A	12	25 (31)	Grader	147	A8	2.75 (40)
				Earthmover	150	B	2.75 (40)
				Loader-Dozer	172	A2	4.25 (62)
14.00-24TG	N/A	16	26 (33)	Grader	153	A8	3.75 (54)
				Earthmover	156	B	3.75 (54)
				Loader-Dozer	177	A2	5.50 (80)
370/75-28	N/A	14	33 (42)	Earthmover	149	B	3.25 (47)
				Loader-Dozer	167	A2	5.00 (73)
370/75-28	N/A	18	33 (42)	Earthmover	154	B	4.25 (62)
				Loader-Dozer	173	A2	6.50 (94)
400/75-28	N/A	16	36 (45)	Earthmover	155	B	3.50 (51)
				Loader-Dozer	173	A2	5.25 (76)
400/75-28	N/A	18	36 (45)	Earthmover	160	B	4.25 (62)
				Loader-Dozer	176	A2	6.00 (87)

CAMSO SL G2



TELEHANDLERS



HEAVY-DUTY OFF-ROAD DURABILITY AND TRACTION

Delivers exceptional off-road durability and traction. With excellent cleanout and deep tread depth, it optimizes traction and durability in heavy-duty, off-road applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SL G2



EXTRA-DEEP TREAD PATTERN

- Provides best durability and traction in off-road conditions

HAULER STEPPED TREAD DESIGN

- Provides excellent cleanout for improved traction



FLATTER TREAD PROFILE

- Resists tread crowning for even wearing

HEAVY-DUTY SIDEWALL CONSTRUCTION

- Provides superior side impact resistance and stability

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
13.00-24TG	N/A	12	29 (36)	Grader	143	A8	3.0 (44)
				Earthmover	146	B	3.0 (44)
				Loader-Dozer	168	A8	4.5 (65)
13.00-24TG	N/A	16	29 (36)	Grader	153	A8	4.0 (58)
				Earthmover	152	B	4.0 (58)
				Loader-Dozer	173	A2	6.0 (87)
14.00-24TG	N/A	12	32 (40)	Grader	147	A8	2.75 (40)
				Earthmover	150	B	2.75 (40)
				Loader-Dozer	172	A2	4.25 (62)
14.00-24TG	N/A	16	32 (40)	Grader	153	A8	3.75 (54)
				Earthmover	156	B	3.75 (54)
				Loader-Dozer	177	A2	5.50 (80)



CAMSO SL G3



TELEHANDLERS



MULTI-SURFACE STABILITY AND PERFORMANCE

Performs well both off-road and on hard surfaces. Engineered with durability and traction in mind, it also delivers superior side impact resistance and stability in heavy-duty applications.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SL G3



OPTIMIZED LUG-TO-VOID RATIO

- Provides excellent traction for mixed and hard surface applications

EXTRA-DEEP NON-DIRECTIONAL TREAD PATTERN

- Optimizes durability and traction on mixed and hard surfaces



FLATTER TREAD PROFILE

- Resists tread crowning for even wearing

HEAVY-DUTY SIDEWALL CONSTRUCTION

- Provides superior side impact resistance and stability

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
370/75-28	N/A	14	28 (35)	Earthmover	149	B	3.25 (47)
				Loader-Dozer	167	A2	5.00 (73)
400/75-28	N/A	16	28 (35)	Earthmover	155	B	3.50 (51)
				Loader-Dozer	173	A2	5.25 (76)



CAMSO CMP 576

FORMERLY SOLIDEAL SM C1



COMPACTORS



EXCELLENT COMPACTION PERFORMANCE

Provides excellent performance and durability. Wears evenly and reduces ground pressure for maximum compaction.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO CMP 576



SMOOTH, FLAT TREAD PROFILE

- Promotes even wear and reduced ground pressure for better compaction performance



HEAT-RESISTANT RUBBER COMPOUND

- Improves durability for lower cost per hour

ROBUST TREAD SHOULDER

- Provides optimum compaction and minimal grooving

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
7.50-15 NHS *	N/A	14	N/A	136	A3	8.50 (123)
8.50/90-15K	N/A	6	N/A	120	A3	3.50 (50)
11.00-20 NHS *	N/A	16	17 (21)	167	A2	7.40 (107)
11.00-20 NHS *	N/A	18	17 (21)	169	A2	8.40 (122)

* Tube Type



CAMSO MST 776



LOAD HAUL DUMP



BEST HARD SURFACE DURABILITY

Engineered to maximize service life and to resist sidewall and tread impact for maximized uptime in extreme underground mining application.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO MST 776



MASSIVE L5 SMOOTH TREAD PATTERN

- Provides excellent puncture and impact resistance
- Improves traction with minimal tire slippage

PREMIUM RUBBER COMPOUNDS

- Enhances wearing and cut resistance



IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

RIM GUARD PROTECTOR

- Protects wheel for longer life and constant inflation

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
12.00-24	N/A	24	56 (71)	178	A2	9.75 (141)



CAMSO CWL 532



COMPACT
WHEEL LOADERS



DURABLE OFF-ROAD PERFORMANCE

A versatile compact wheel loader tire solution providing off-road traction and impact resistance while reducing vibrations for improved driving comfort.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO CWL 532



**ENHANCED TREAD DEPTH
WITH CURVED TREAD LUGS**

- Ensures great durability and extra traction

STEPPED TREAD DESIGN

- Enhances cleanout for improved off-road traction



**IMPACT GUARD WITH ENHANCED
RIM PROTECTION**

- Protects sidewalls and rim flanges, reducing impact damage and flat tires

**VOID GUARD TREAD IMPACT
PROTECTION**

- Enhances tread impact protection to reduce risk of punctures

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
12.5/70-16	N/A	6	23 (29)	120	A2	2.00 (29)
12.5/70-16	N/A	8	24 (30)	125	A2	2.60 (38)
15.5/60-18	N/A	8	22 (28)	135	A2	2.20 (32)



CAMSO MPT 552



MINI-DUMPERS



CONCRETE
MIXERS



TELEHANDLERS



A SMOOTH RIDE WITH ENHANCED TRACTION

Provides versatility and durability
in off-road applications.
Reduces vibrations for enhanced driving
comfort while providing excellent
traction in off-road conditions
camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO MPT 552



VERSATILE DIRECTIONAL TREAD PATTERN WITH CENTRE BLOCK

- Reduces vibrations and enhances driving comfort

SELF-CLEANING STEPPED TREAD

- Maximizes cleanout for improved off-road traction



OPEN SHOULDER TREAD DESIGN

- Provides excellent traction in off-road conditions

IMPROVED HEEL ENGINEERING

- Reduces mounting and inflation time

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
10.0/75-15.3 IMP	255/75-15.3	12	21 (26)	114 / 126	A8	4.70 (68)
10.0/75-15.3 IMP	255/75-15.3	18	21 (26)	124 / 137	A8	7.10 (103)
11.5/80-15.3 IMP	295/80-15.3	14	21 (26)	126 / 139	A8	4.75 (69)
12.0/75-18 IMP	300/75-18	12	20 (25)	126 / 139	A8	4.00 (58)

Higher load capacities may be allowed for cyclic loaded (HLV) applications with a one way distance of maximum 1 km. Contact our technical department for more information.
All tires listed are tubeless.

CAMSO MPT 732



BACKHOE
LOADERS



TELEHANDLERS



COMPACT WHEEL
LOADERS



BEST OFF-ROAD TRACTION AND DURABILITY

The ultimate mixed soft surface backhoe tire solution. Deepest traction tread with enhanced protective features to maximize durability in softer conditions.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO MPT 732



MASSIVE DIRECTIONAL TREAD LUGS WITH EXTENDED CENTRE BLOCKS

- Maximizes off-road traction and durability

WRAPAROUND STEPPED TREAD DESIGN

- Maximizes tread cleanout for best off-road traction



EXTRA THICK VOID GUARD

- Maximizes tread impact protection to reduce risk of punctures

HEAVY-DUTY SIDEWALL WITH ENHANCED RIM PROTECTION

- Provides enhanced sidewall and rim flange protection, reducing impact damage and flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX		SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
280/80-18 IND	10.5/80-18	-	18 (23)	132		A8	4.00 (58)
320/80-18 IND	12.5/80-18	12	25 (32)	Free roll: 142	Drive: 129	A8	3.70 (54)
340/80-18 IND	12.5-18, 335/80-18	-	22 (28)	143		A8	4.00 (58)
400/70-20 IND	16.0/70-20, 405/70-20	-	31 (39)	149		A8	4.00 (58)
440/80-24 IND	16.9-24, 16.5/85-24	-	26 (33)	154		A8	3.20 (46)
500/70-24 IND	19.5L-24	12	25 (31)	151		A8	2.30 (33)
480/80-26 IND	18.4-26	-	37 (29)	160		A8	3.20 (46)
440/80-28 IND	16.9-28	12	35 (44)	152		A8	2.60 (38)

CAMSO MPT 753



TELEHANDLERS



COMPACT WHEEL
LOADERS



BACKHOE
LOADERS



THE NEXT GENERATION IN VERSATILITY AND DURABILITY

Engineered to provide enhanced traction in a variety of surface applications without sacrificing ride quality. Excellent overall durability and puncture resistance ensure maximum service life.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO MPT 753



FLAT NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO

- Enhances stability, ride quality and durability

VOID GUARD IMPACT PROTECTION

- Protects from tread punctures to minimize flat tires



IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

STEPPED AND OPEN SHOULDER LUGS

- Enhances traction on softer surfaces for better versatility

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
340/80-18 IND	12.5-18; 335/80-18	-	21 (26)	143	A8	4.00 (58)
400/70-18 IND	405/70-18; 15.5/70-18	-	29 (38)	147	A8	4.00 (58)
445/70-19.5	18-19.5	20	30 (39)	180	A2	7.50 (109)
340/80-20 IND	12.5-20; 335/80-20	-	25 (31)	144	A8	4.00 (58)
400/70-20 IND	405/70-20; 16.0/70-20	-	27 (34)	155	A8	5.00 (73)
445/70-22.5	18-22.5	20	35 (44)	182	A2	7.50 (109)
400/70-24 IND	405/70-24; 16.0/70-24	-	29 (37)	158	A8	5.00 (73)
400/80-24 IND	14.9-24; 15.5/80-24	-	33 (42)	162	A8	5.00 (73)
440/80-24 IND	16.9-24; 16.5/85-24	-	34 (43)	154	A8	3.20 (46)
				168		5.00 (73)
460/70-24 IND	17.5L-24	-	34 (43)	159	A8	4.00 (58)
500/70-24 IND	19.5L-24	-	27 (35)	164	A8	4.00 (58)
480/80-26 IND	18.4-26	-	27 (35)	160	A8	3.20 (46)
440/80-28 IND	16.9-28	-	36 (48)	156	A8	3.20 (46)

All tires listed are tubeless.

CAMSO MPT 774



BACKHOE
LOADERS



COMPACT WHEEL
LOADERS



HEAVY-DUTY COMBINATION OF DURABILITY AND PUNCTURE RESISTANCE

Tough and durable pneumatic tire solution for backhoe and compact wheel loaders. Best choice for rocky and severe-duty applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO MPT 774



**DEEP TREAD PATTERN
WITH HIGH LUG-TO-VOID RATIO**

- Provides excellent tire life and tread impact resistance

EXTRA THICK VOID GUARD

- Maximizes tread impact protection to reduce risk of punctures



**NON-DIRECTIONAL,
STEPPED TREAD DESIGN
WITH INNOVATIVE OPEN SHOULDERS**

- Enhances self-cleaning and versatility

**IMPACT GUARD WITH ENHANCED
RIM PROTECTION**

- Protects sidewalls and rim flanges, reducing impact damage and flat tires

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
320/80-18 IND	12.5/80-18	N/A	40 (50)	139	A8	4.00 (58)



CAMSO 4L 13




TELEHANDLERS



WHEEL
LOADERS



MINI-
DUMPERS

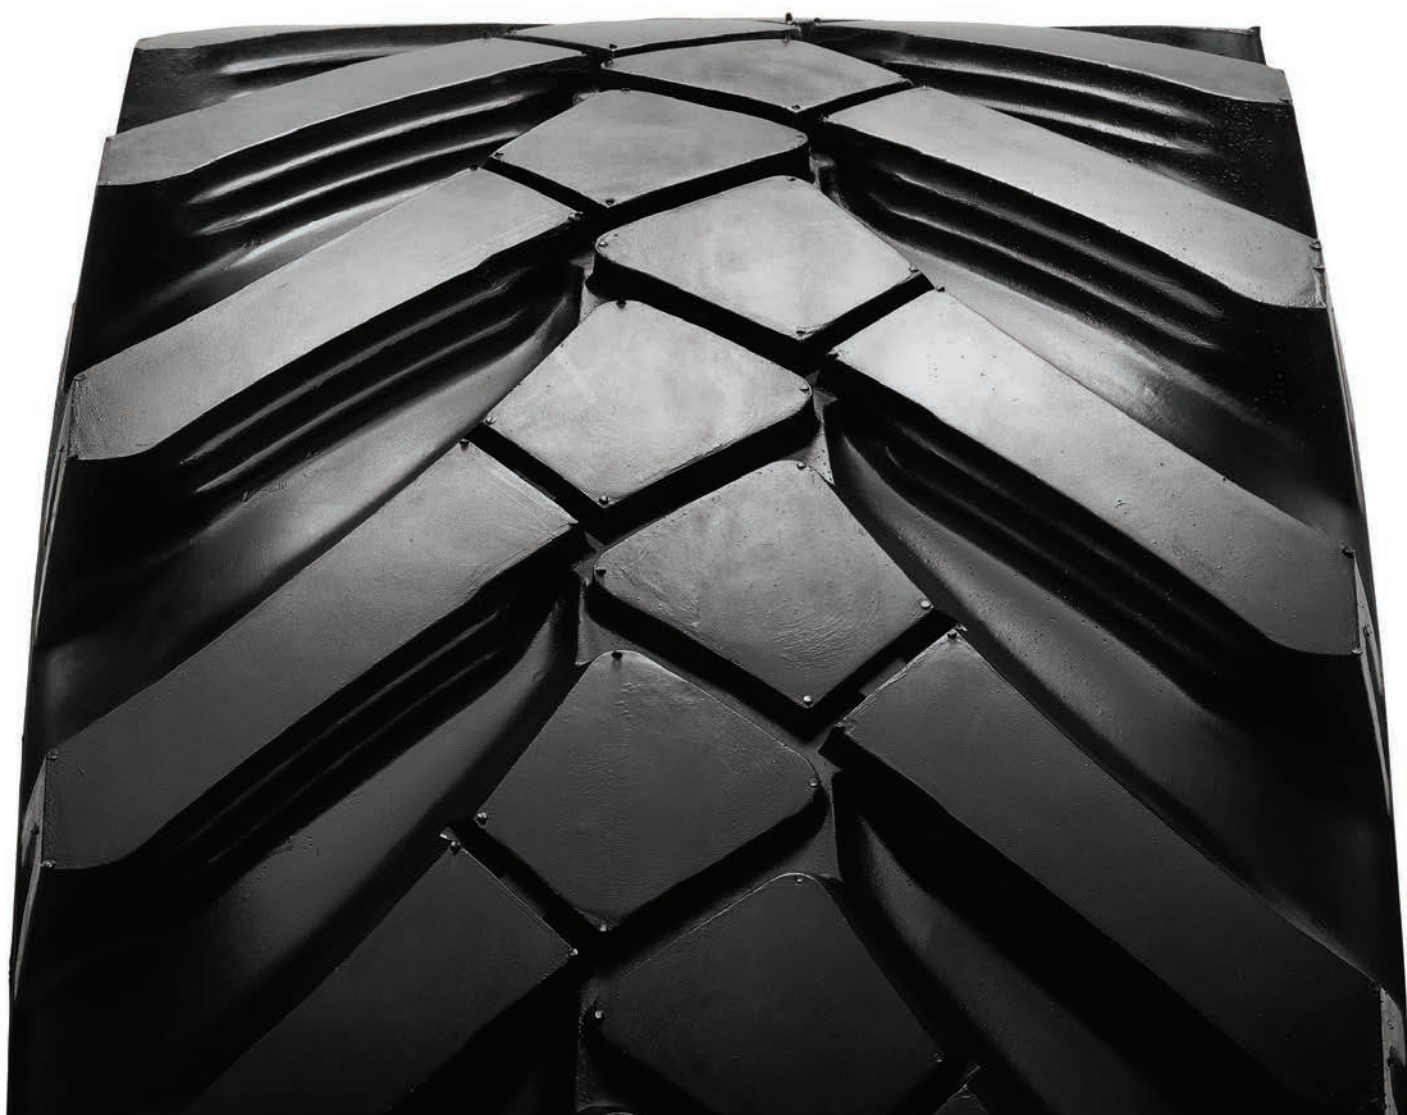

A SMOOTH RIDE WITH ENHANCED TRACTION

Provides exceptional versatility and durability in both on-and off-road applications. Reduces vibrations for enhanced driving comfort while providing excellent traction in off-road conditions.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO 4L I3



VERSATILE DIRECTIONAL TREAD PATTERN WITH CENTER BLOCK

- Reduces vibrations and enhances driving comfort

HAULER STEPPED TREAD DESIGN

- Maximizes tread cleanout in off-road conditions for improved traction



OPEN SHOULDER TREAD DESIGN

- Provides excellent traction in off-road conditions

HEAVY-DUTY CARCASS

- Provides excellent stability and side impact resistance

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
10.0/75-15.3	255/75-15.3	8	19 (24)	119 - 106	A8	3.1 (45)
10.5-18	-	10	27 (34)	130	B	4.5 (65)
12.5-18	335/80-18; 340/80-18	12	22 (28)	135	B	4.2 (61)
10.5-20	-	10	22 (28)	132	B	4.5 (65)
12.5-20	335/80-20; 340/80-20	12	23 (29)	136	B	4.2 (61)
14.5-20	-	14	27 (34)	143	B	4.2 (61)
405/70-20	16/70-20	12	26 (33)	151 - 139	A8	3.0 (43)
405/70-20	16/70-20	14	26 (33)	154 - 142	A8	3.5 (50)
405/70-24	16/70-24	14	27 (34)	156 - 144	A8	3.5 (50)

CAMSO 4L R1



TELEHANDLERS



BACKHOE
LOADERS



MINI-
DUMPERS



TRACTION THAT CAN'T BE BEAT

Delivers excellent stability and side impact resistance in any off-road conditions.
A multi-purpose, high-traction tire solution.
camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO 4L R1



AGGRESSIVE CURVED R1 TREAD PATTERN

- Maximizes traction and improves ride quality

HAULER STEPPED TREAD DESIGN

- Maximizes tread cleanout in off-road conditions for improved traction



ROBUST CARCASS DESIGN

- Improves stability and side impact resistance

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
10.0/75-15.3 IMP	255/75-15.3	12	20 (25)	126 – 114	A8	4.7 (68)
11.5/80-15.3 IMP	295/80-15.3	8	23 (29)	126 – 114	A8	2.7 (39)
11.5/80-15.3 IMP	295/80-15.3	14	23 (29)	139 – 126	A8	4.75 (69)
18-19.5	445/70-19.5	16	31 (39)	161	A8	5.9 (85)
405/70-20	16/70-20; 400/70-20	14	34 (43)	154 – 142	A8	3.5 (50)
18-22.5	445/70-22.5	16	34 (43)	164	A8	5.9 (85)
405/70-24	16/70-24; 400/70-24	14	27 (34)	156 – 144	A8	3.5 (50)
15.5/80-24 IMP	400/80-24	14	40 (50))	160 – 148	A8	3.5 (50)
15.5/80-24 IMP	400/80-24	16	40 (50)	163 – 151	A8	4.0 (58)
16.5/85-24 IMP	16.9-24; 440/80-24	8	25 (31)	154 – 142	A8	1.9 (28)
16.5/85-24 IMP	16.9-24; 440/80-24	14	26 (33)	165 – 153	A8	3.3 (48)
17.5L-24 IND	460/70-24 IND	N/A	26 (33)	159	A8	4.0 (58)

CAMSO TM R4



COMPACT
WHEEL LOADERS



DURABLE OFF-ROAD PERFORMANCE

Provides incomparable durability and traction for heavy-duty applications. Enhanced tread cleanout and lug stability combined to maximize performance.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO TM R4



HAULER STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction

OPTIMIZED LUG-TO-VOID RATIO

- Enhances longevity and tread puncture resistance



HEAVY-DUTY CARCASS

- Provides excellent stability and side impact resistance

TAPERED TREAD LUGS

- Improves lug stability for even wearing

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]			[bar] [PSI]
445/70-19.5	18-19.5	12	28 (35)	161	A8	5.9 (85)
445/70-19.5	18-19.5	16	29 (37)	167	A8	7.5 (109)
445/70-22.5	18-22.5	16	31 (39)	164	A8	5.9 (85)
445/70-22.5	18-22.5	20	34 (43)	170	A8	7.5 (109)
405/70-20	16/70-20	14	27 (34)	154 - 142	A8	3.5 (50)
405/70-20	16/70-20; 400/70-20	16	32 (40)	168	A2	5.0 (73)
				150	B	4.0 (58)
400/80-24 IND	15.5/80-24	N/A	37 (47)	162	A8	5.0 (73)
440/80-24 IND	16.9-24; 16.5/85-24	N/A	34 (43)	168	A8	5.0 (73)
460/70-24 IND	17.5L-24	N/A	34 (43)	159	A8	4.0 (58)

CAMSO WEX 552



WHEEL
EXCAVATORS



PERFORMANCE AND QUALITY YOU CAN COUNT ON

Delivers reliable performance for wheel excavators. Enhances stability with added side impact resistance and excellent traction.

camsconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WEX 552



ROBUST CARCASS

- Enhances stability and side impact resistance

ADVANCED RUBBER COMPOUNDS

- Improves durability and cut resistance



DEEP LUG DEPTH

- Enhances durability and traction

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
8.25-20	N/A	14	21 (26)	N/A	148	A2	9.00 (129)
9.00-20	N/A	14	19 (24)	N/A	153	A2	8.50 (121)
10.00-20	N/A	16	21 (26)	N/A	158	A2	8.50 (121)



CAMSO WEX 732



WHEEL
EXCAVATORS



THE ULTIMATE OFF-ROAD TRACTION AND FLOTATION

Engineered to provide ultimate
off-road traction and flotation
on mixed-soft surfaces.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WEX 732



VOID GUARD TREAD IMPACT PROTECTION

- Protects from tread punctures to minimize flat tires

SELF-CLEANING STEPPED TREAD

- Maximizes cleanout for improved off-road traction



IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

LOW ASPECT TIRE SIZE

- Maximizes traction and flotation

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
500/45-20	8.25-20 (Dual)	N/A	29 (37)	N/A	158	A8	6.00 (87)



CAMSO WEX 752



WHEEL
EXCAVATORS



ULTIMATE OFF-ROAD PERFORMANCE AND DURABILITY

Engineered for today's heavier machines to provide maximum performance and durability on mixed-hard surfaces. Provides excellent traction and stability with superior impact protection.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WEX 752



MASSIVE DIRECTIONAL TREAD LUGS WITH EXTENDED CENTRE

- Maximizes off-road traction and durability

EXTRA THICK VOID GUARD

- Maximizes tread impact protection to reduce risk of punctures

WRAPAROUND STEPPED TREAD DESIGN

- Enhances tread cleanout for best off-road traction



INTEGRATED STONE GUARD*

- Eliminates the need for a spacer while protecting inner sidewalls against impacts

HEAVY-DUTY SIDEWALL

- Provides enhanced sidewall protection, maximizes stability and operator comfort

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
8.25-20	N/A	14	17 (21)	N/A	140	A8	8.00 (116)
9.00-20	N/A	14	20 (25)	N/A	160	A2	7.00 (102)
9.00-20	N/A	18	26 (33)	N/A	164	A2	8.50 (121)
10.00-20	N/A	16	21 (26)	N/A	149	A8	7.50 (109)
290/90-20	N/A	18	26 (33)	N/A	168	A2	9.00 (130)



CAMSO WL



WHEEL
EXCAVATORS



HIGH PERFORMANCE, MAXIMUM PROTECTION

Optimizes performance and durability for wheel excavators. Provides the best stability, side impact protection and cut resistance for heavy-duty applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WL



HEAVY-DUTY CARCASS

- Provides best stability and side impact resistance

PREMIUM RUBBER COMPOUNDS

- Provides best durability and cut resistance



LARGE CASING DESIGN

- Improves ride quality and stability

EXTRA-DEEP LUG DEPTH

- Provides best durability and traction

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
8.25-20	N/A	14	26 (33)	N/A	148	A2	9.00 (129)
9.00-20	N/A	14	27 (34)	N/A	153	A2	8.50 (121)
10.00-20	N/A	16	26 (33)	N/A	158	A2	8.50 (121)
11.00-20	N/A	16	24 (30)	N/A	160	A2	8.50 (121)



CAMSO WHL 773



WHEEL LOADERS



RELIABLE PERFORMANCE IN HARSH APPLICATIONS

Provides reliable performance on any surface. Brings chipping and chunking resistance as well as stability to abrasive and rocky settings.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 773



WIDE FOOTPRINT

- Excellent stability in abrasive and rocky conditions

MONO-BLOCK TREAD PATTERN

- Resists rubber chipping and chunking



HIGH LUG-TO-VOID RATIO

- Provides excellent durability and tread impact resistance

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
17.5-25	N/A	16	27 (34)	Grader	150	A8	2.75 (40)
				Earthmover	158	B	3.00 (44)
				Loader-Dozer	177	A2	4.75 (69)
20.5-25	N/A	20	28 (35)	Grader	160	A8	2.75 (40)
				Earthmover	170	B	3.25 (47)
				Loader-Dozer	186	A2	4.50 (65)
23.5-25	N/A	20	33 (42)	Earthmover	177	B	3.00 (44)
				Loader-Dozer	191	A2	3.75 (54)
23.5-25	N/A	24	33 (42)	Earthmover	180	B	3.50 (51)
				Loader-Dozer	196	A2	4.75 (69)
26.5-25	N/A	28	37 (47)	Earthmover	188	B	3.50 (51)
				Loader-Dozer	203	A2	4.75 (69)



CAMSO WHL 775



WHEEL LOADERS



EXTREME-DUTY L-5 SOLUTION COMBINING DURABILITY AND PUNCTURE RESISTANCE

With excellent stability and durability, it's the ideal L-5 tire solution for extreme mixed and hard surface loader applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 775



EXTRA-DEEP L-5 TRACTION TREAD

- Provides reliable traction and enhanced protection against punctures in extreme mixed and hard surface applications

HEAVY-DUTY REINFORCED CARCASS

- Enhances durability and stability under load in extreme mixed and hard surface applications



HEAVY-DUTY SIDEWALL CONSTRUCTION

- Protects against side impacts and damage in severe applications

CONTOURED LUG BASE

- Promotes stone ejection and resistance to cracking

TIRE SIZE	PR	RIM SIZE	ACTUAL TIRE DIMENSIONS					LOAD INDEX	SPEED SYMBOL	TRA CODE	SERVICE	MAXIMUM TIRE LOAD [kg] [lb]						
		Recommended (Permitted)	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]	S.L.R. [mm] [in]	R.C. [mm] [in]					Inflation pressure [bar] [PSI]	Static	5 km/h 3 mph	10 km/h 6 mph	20 km/h 12 mph	30 km/h 18 mph	40 km/h 24 mph
17.5-25	16	14.00/1.5 (14.00/1.3 (DC))	1403	448	62	649	4231	177	A2	L-5	LOADER-DOZER	4.75	11700	8300	7300	6150	5600	5100
			55.2	17.6	78	25.6	166.6					69	25795	18300	16095	13560	12345	11245
20.5-25	20	17.00/2.0	1563	532	77	711	4714	186	A2	L-5	LOADER-DOZER	4.5	15200	10800	9500	8000	7300	6650
			61.5	20.9	97	28	185.6					65	33510	23810	20945	17635	16095	14660
23.5-25	20	19.50/2.5	1670	597	88	768	5037	191	A2	L-5	LOADER-DOZER	3.75	17400	12400	10900	9150	8400	7650
			65.7	23.5	111	30.2	198.3					54	38360	27335	24030	20170	18520	16865
26.5-25	28	22.00/3.0	1798	676	92	827	5423	203	A2	L-5	LOADER-DOZER	4.75	24800	17700	15500	13000	11900	10900
			70.8	26.6	116	32.6	213.5					69	54675	39020	34170	28660	26235	24030

All tires listed are tubeless.

CAMSO LM L2



WHEEL LOADERS



OFF-ROAD TRACTION AND DURABILITY

Engineered to maximize traction and tire life in off-road applications. Delivers excellent performance with enhanced traction, durability and side impact resistance.

camsococonstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO LM L2



HEAVY-DUTY CARCASS

- Increases side impact resistance and stability



HAULER STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction

DEEP AND FLAT TREAD PROFILE

- Reduces tread crowning for improved durability

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
15.5-25	N/A	12	26 (33)	Grader	142	A8	2.25 (32)
				Earthmover	149	B	2.50 (36)
				Loader-Dozer	168	A2	4.00 (58)
15.5-25	N/A	16	26 (33)	Grader	146	A8	3.25 (47)
				Earthmover	156	B	3.25 (47)
				Loader-Dozer	175	A2	5.50 (80)
17.5-25	N/A	12	28 (35)	Grader	145	A8	2.00 (29)
				Earthmover	153	B	2.25 (32)
				Loader-Dozer	171	A2	3.50 (51)
17.5-25	N/A	16	27 (34)	Grader	150	A8	2.75 (40)
				Earthmover	158	B	3.00 (44)
				Loader-Dozer	177	A2	4.75 (69)
17.5-25	N/A	20	27 (34)	Earthmover	164	B	4.00 (58)
				Loader-Dozer	181	A2	5.75 (83)
17.5-25	N/A	24	26 (33)	Earthmover	171	B	4.75 (69)
				Loader-Dozer	188	A2	7.0 (102)
20.5-25	N/A	16	30 (38)	Grader	156	A8	2.25 (32)
				Earthmover	167	B	2.75 (40)
				Loader-Dozer	181	A2	3.50 (51)

CAMSO LM L3



WHEEL LOADERS



MULTI-SURFACE PERFORMANCE

Delivers optimized performance on all surfaces. With enhanced side impact resistance and improved stability, it reduces flats and improves ride quality in all types of applications.

camsoconstruction.com

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO LM L3



HEAVY-DUTY CARCASS

- Increases side impact resistance and stability

STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction



NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO


- Ensures even tread wearing for greater durability

DEEP AND FLAT TREAD PROFILE

- Reduces tread crowning for improved durability

TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
13.00-24TG	N/A	12	28 (35)	Grader	143	A8	3.00 (44)
				Earthmover	146	B	3.00 (44)
				Loader-Dozer	168	A2	4.50 (65)
14.00-24TG	N/A	12	27 (34)	Grader	147	A8	2.75 (40)
				Earthmover	150	B	2.75 (40)
				Loader-Dozer	172	A2	4.25 (62)
14.00-24TG	N/A	16	28 (35)	Grader	153	A8	3.75 (54)
				Earthmover	156	B	3.75 (54)
				Loader-Dozer	177	A2	5.50 (80)
15.5-25	N/A	12	27 (34)	Grader	142	A8	2.25 (32)
				Earthmover	149	B	2.50 (36)
				Loader-Dozer	168	A2	4.00 (58)
15.5-25	N/A	16	27 (34)	Grader	152	A8	3.25 (47)
				Earthmover	156	B	3.25 (47)
				Loader-Dozer	175	A2	5.50 (80)
17.5-25	N/A	12	27 (34)	Grader	145	A8	2.00 (29)
				Earthmover	153	B	2.25 (32)
				Loader-Dozer	171	A2	3.50 (51)
17.5-25	N/A	16	26 (33)	Grader	150	A8	2.75 (40)
				Earthmover	158	B	3.00 (44)
				Loader-Dozer	177	A2	4.75 (69)
17.5-25	N/A	20	28 (35)	Earthmover	164	B	4.00 (58)
				Loader-Dozer	181	A2	5.75 (83)
17.5-25	N/A	24	27 (34)	Earthmover	171	B	4.75 (69)
				Loader-Dozer	188	A2	7.00 (102)
20.5-25	N/A	16	32 (40)	Grader	156	A8	2.25 (32)
				Earthmover	167	B	2.75 (40)
				Loader-Dozer	181	A2	3.50 (51)

CAMSO LM L3



TIRE SIZE	ALTERNATIVE SIZE	PR	O.T.D.	SERVICE TYPE	LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE
			[mm] [32 nd inch]				[bar] [PSI]
20.5-25	N/A	20	31 (39)	Earthmover	170	B	3.25 (47)
				Loader-Dozer	186	A2	4.50 (65)
23.5-25	N/A	20	36 (45)	Earthmover	177	B	3.00 (44)
				Loader-Dozer	191	A2	3.75 (54)
23.5-25	N/A	24	37 (47)	Earthmover	180	B	3.50 (51)
				Loader-Dozer	196	A2	4.75 (69)
26.5-25	N/A	20	40 (50)	Earthmover	181	B	2.50 (36)
				Loader-Dozer	198	A2	3.50 (51)
26.5-25	N/A	28	39 (49)	Earthmover	188	B	3.50 (51)
				Loader-Dozer	203	A2	4.75 (69)



NOTES:-



camsconstruction.com



For Product or Service Support:
customer.service@camsconstruction.com



For General Queries or Feedback:
customer.relations@camsconstruction.com

