

CAMSO LM L2



WHEEL LOADERS



OFF-ROAD TRACTION AND DURABILITY

Engineered to maximize traction and tire life in off-road applications. Delivers excellent performance with enhanced traction, durability and side impact resistance.

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO LM L2



HEAVY-DUTY CARCASS

- Increases side impact resistance and stability

HAULER STEPPED TREAD DESIGN


- Enhances tread cleanout for improved traction

DEEP AND FLAT TREAD PROFILE

- Reduces tread crowning for improved durability

TIRE SIZE	PR	ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TREAD CODE	MAXIMUM TIRE LOAD													
		O.D. [inch]	O.W. [inch]	O.T.D. [32nd inch]				STATIC	3 mph	6 mph	9 mph	12.5 mph	16 mph	19 mph	22 mph	25 mph	28 mph	31 mph	34 mph	37 mph	40 mph
15.5-25	12	50,5	15,9	33	168	A2	L-2	19730	14110	12345	10750	10360	9865	9480	9150	8655	8265	7780	-	-	-
					149	B	E-2	-	-	-	8045	7880	7715	7605	7440	7385	7330	7165	6945	6615	5950
					142	A8	G-2	-	-	-	-	-	-	-	-	-	5840	-	5290	-	4795
15.5-25	16	50,4	16,4	33	175	A2	L-2	24250	17305	15210	13230	12785	12125	11685	11245	10635	10195	9590	-	-	-
					156	B	E-2	-	-	-	9865	9700	9535	9370	9150	9095	8985	8820	8545	8100	7330
					146	A8	G-2	-	-	-	-	-	-	-	-	-	7825	-	7110	-	6395
17.5-25	12	53,4	18,0	33	171	A2	L-2	21715	15430	13560	11795	11355	10860	10415	10030	9480	9085	8545	-	-	-
					153	B	E-2	-	-	-	9040	8875	8710	8545	8380	8265	8210	8045	7825	7385	6670
					145	A8	G-2	-	-	-	-	-	-	-	-	-	6398	-	5840	-	5235
17.5-25	16	52,9	18,2	33	177	A2	L-2	25795	18300	16095	14000	13560	12895	12345	11905	11245	10780	10140	-	-	-
					158	B	E-2	-	-	-	10470	10305	10140	9920	9755	9645	9535	9370	9095	8600	7770
					150	A8	G-2	-	-	-	-	-	-	-	-	-	7385	-	6725	-	6065
17.5-25	24	53,4	18,1	33	188	A2	L-2	35275	25135	22045	19180	18520	17635	16975	16315	15430	14770	13890	-	-	-
					171	B	E-2	-	-	-	15190	14915	14640	14375	14100	13965	13835	13560	13120	12455	11245
20.5-25	16	58,9	21,3	38	181	A2	L-2	29100	20725	18190	15875	15320	14550	14000	13450	12785	12190	11465	-	-	-
					167	B	E-2	-	-	-	13450	13230	13005	12785	12455	12345	12235	12015	11685	11025	9975
					156	A8	G-2	-	-	-	-	-	-	-	-	-	8820	-	8045	-	7220
20.5-25	20	58,5	21,7	38	186	A2	L-2	33510	23810	20945	18190	17635	16755	16095	15545	14660	14030	13195	-	-	-
					170	B	E-2	-	-	-	14815	14550	14285	14020	13755	13625	13490	13230	12785	12125	10970

CAMSO LM L2 ENTRY LEVEL L2 COMPETITOR

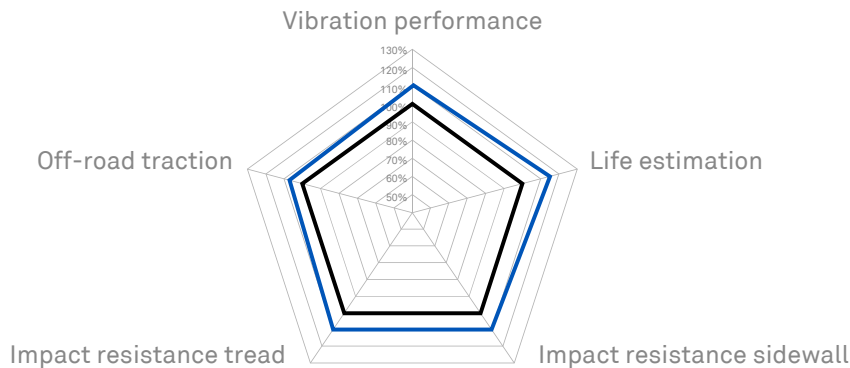

Poor traction in off-road conditions can be a big problem for many wheel loader applications. Camso LM L2 enhances traction with deep tread lugs and hauler steps. Additionally, a heavy-duty carcass and high lug-to-void ratio improves longevity and impact resistance.

